

LWAA15050 Series



Product Characteristic

- Frame: Aluminum alloy
- Impeller: PBT Plastic
- Connection: Lead Wire or Terminals
- Ball Bearing: -20°C to +70°C
- Sleeve Bearing: -10°C to +70°C
- Package: 20PCS/CTN
- Protected: Impedance protected or Thermally protected



Technical Specifications

Model	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Static Pressure (mm-H₂O)	Noise [dB(A)]
LWAA15050UH-13	Ball	115	50/60	0.63/0.56	46/41	2700/3000	190/200	5.38/5.67	10.7/7.8	57/61
LWAA15050UH-14	Ball	115	50/60	0.63/0.56	46/41	2700/3000	190/200	5.38/5.67	10.7/7.8	57/61
LWAA15050UM-15	Ball	115	60	0.43	32	2450	172	4.87	3.2	53
LWAA15050UM-16	Ball	115	60	0.43	32	2450	172	4.87	3.2	53
LWAA15050UL-17	Ball	115	60	0.38	29	2000	133	3.77	2.2	45
LWAA15050UL-18	Ball	115	60	0.38	29	2000	133	3.77	2.2	45
LWAA15050UH-19	Sleeve	115	50/60	0.65/0.57	47/43	2700/2900	182/195	5.15/5.52	8.8/5.2	56/59
LWAA15050UH-20	Sleeve	115	50/60	0.65/0.57	47/43	2700/2900	182/195	5.15/5.52	8.8/5.2	56/59
LWAA15050UM-21	Sleeve	115	60	0.46	35	2500	170	4.82	2.8	53
LWAA15050UM-22	Sleeve	115	60	0.46	35	2500	170	4.82	2.8	53
LWAA15050UL-23	Sleeve	115	60	0.43	32	1900	133	3.77	2.2	44
LWAA15050UL-24	Sleeve	115	60	0.43	32	1900	133	3.77	2.2	44

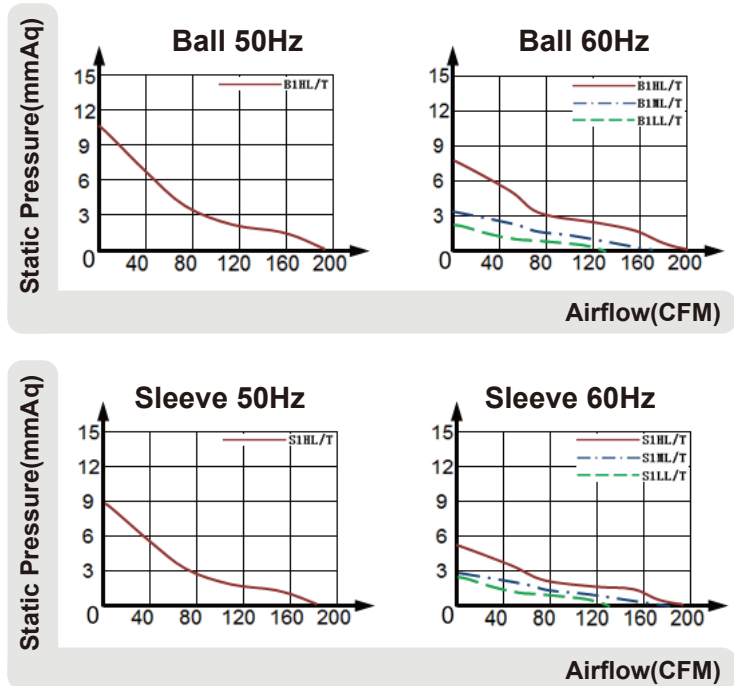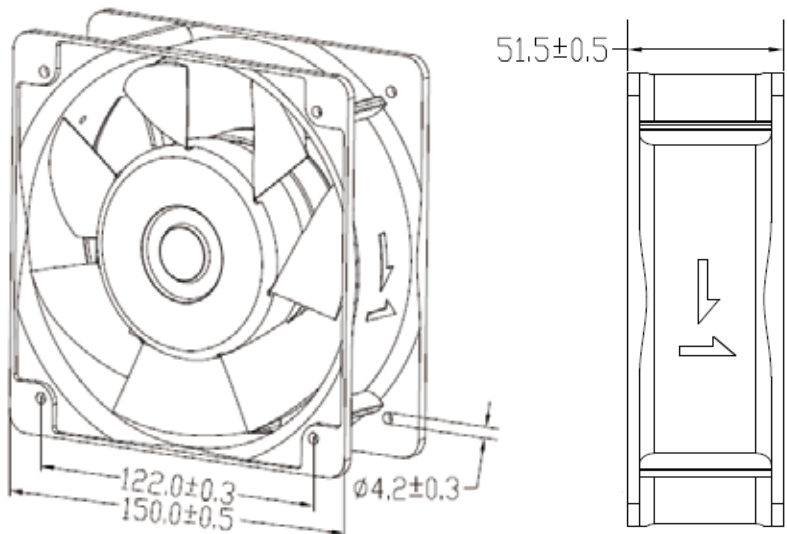

LWAA15050 Series

Product Characteristic

- Frame: Aluminum alloy
- Impeller: PBT Plastic
- Connection: Lead Wire or Terminals
- Ball Bearing: -20°C to +70°C
- Sleeve Bearing: -10°C to +70°C
- Package: 20PCS/CTN
- Protected: Impedance protected or Thermally protected



Technical Specifications

Model	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Static Pressure (mm-H₂O)	Noise [dB(A)]
LWAA15050SH-13	Ball	220-240	50/60	0.31/0.26	42/37	2700/3000	187/200	5.30/5.67	9.5/7.0	57/61
LWAA15050SH-14	Ball	220-240	50/60	0.31/0.26	42/37	2700/3000	187/200	5.30/5.67	9.5/7.0	57/61
LWAA15050SM-15	Ball	220-240	50	0.15	22	2450	162	4.6	4.1	53
LWAA15050SM-16	Ball	220-240	50	0.15	22	2450	162	4.6	4.1	53
LWAA15050SL-17	Ball	220-240	50	0.13	19	2150	150	4.25	2.6	49
LWAA15050SL-18	Ball	220-240	50	0.13	19	2150	150	4.25	2.6	49
LWAA15050SH-19	Sleeve	220-240	50/60	0.31/0.27	42/39	2500/2600	183/195	5.19/5.52	9.5/5.2	56/59
LWAA15050SH-20	Sleeve	220-240	50/60	0.31/0.27	42/39	2500/2600	183/195	5.19/5.52	9.5/5.2	56/59
LWAA15050SM-21	Sleeve	220-240	50	0.17	26	2350	155	4.39	3.2	52
LWAA15050SM-22	Sleeve	220-240	50	0.17	26	2350	155	4.39	3.2	52
LWAA15050SL-23	Sleeve	220-240	50	0.15	22	2000	140	3.97	2.0	46
LWAA15050SL-24	Sleeve	220-240	50	0.15	22	2000	140	3.97	2.0	46

