

LWAA17251 Series



Product Characteristic

- Frame: Aluminum alloy
- Impeller: PBT Plastic
- Connection: Lead Wire or Terminals
- Ball Bearing: -20°C to +70°C
- Sleeve Bearing: -10°C to +70°C
- Package: 20PCS/CTN
- Protected: Impedance protected or Thermally protected



Technical Specifications

Model	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Static Pressure (mm-H₂O)	Noise [dB(A)]
LWAA17251UH-01	Ball	115	50/60	0.63/0.56	46/41	2700/3000	190/200	5.38/5.67	10.7/7.8	57/61
LWAA17251UH-02	Ball	115	50/60	0.63/0.56	46/41	2700/3000	190/200	5.38/5.67	10.7/7.8	57/61
LWAA17251UM-03	Ball	115	60	0.43	32	2450	172	4.87	3.2	53
LWAA17251UM-04	Ball	115	60	0.43	32	2450	172	4.87	3.2	53
LWAA17251UL-05	Ball	115	60	0.38	29	2000	133	3.77	2.2	45
LWAA17251UL-06	Ball	115	60	0.38	29	2000	133	3.77	2.2	45
LWAA17251UH-07	Sleeve	115	50/60	0.65/0.57	47/43	2700/2900	182/195	5.15/5.52	8.8/5.2	56/59
LWAA17251UH-08	Sleeve	115	50/60	0.65/0.57	47/43	2700/2900	182/195	5.15/5.52	8.8/5.2	56/59
LWAA17251UM-09	Sleeve	115	60	0.46	35	2500	170	4.82	2.8	53
LWAA17251UM-10	Sleeve	115	60	0.46	35	2500	170	4.82	2.8	53
LWAA17251UL-11	Sleeve	115	60	0.43	32	1900	133	3.77	2.2	44
LWAA17251UL-12	Sleeve	115	60	0.43	32	1900	133	3.77	2.2	44

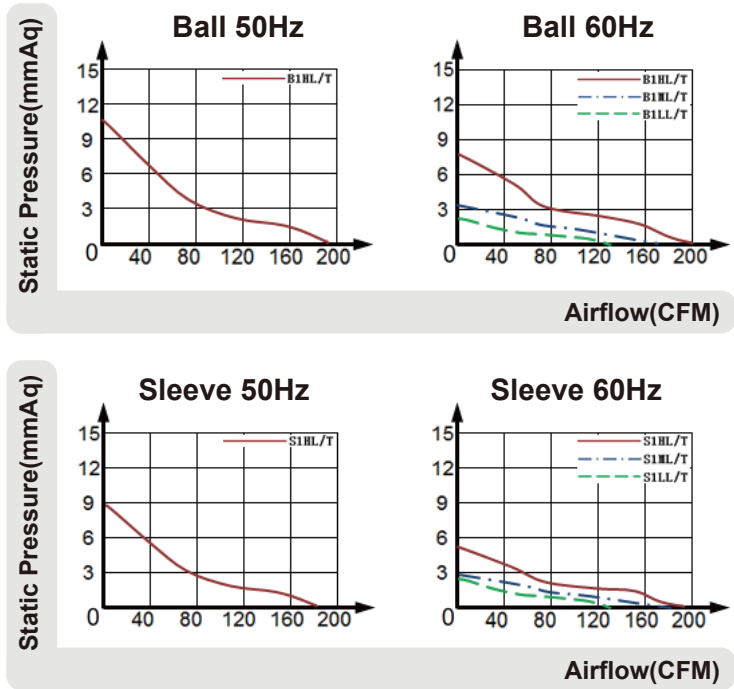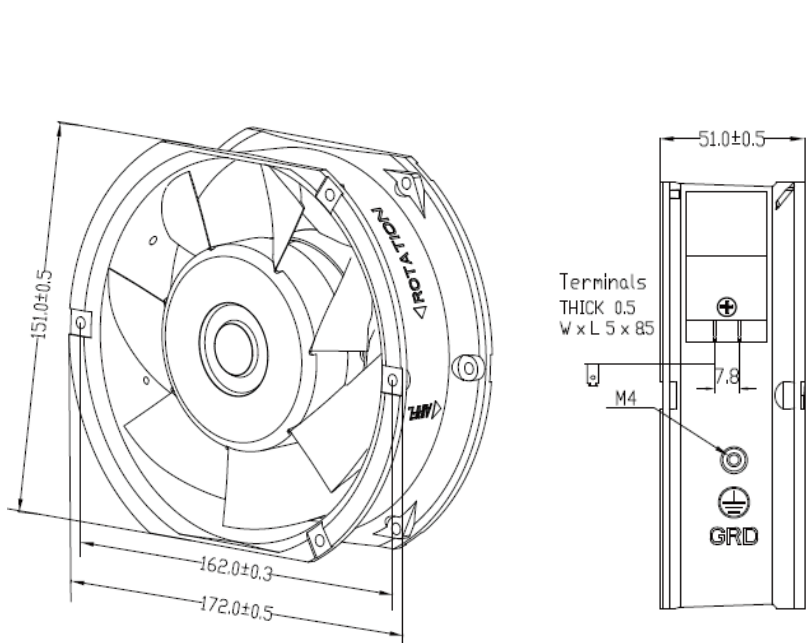

LWAA17251 Series

Product Characteristic

- Frame: Aluminum alloy
- Impeller: PBT Plastic
- Connection: Lead Wire or Terminals
- Ball Bearing: -20°C to +70°C
- Sleeve Bearing: -10°C to +70°C
- Package: 20PCS/CTN
- Protected: Impedance protected or Thermally protected



Technical Specifications

Model	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Static Pressure (mm-H₂O)	Noise [dB(A)]
LWAA17251SH-01	Ball	220-240	50/60	0.31/0.26	42/37	2700/3000	178/190	5.04/5.38	13.3/12.1	56/60
LWAA17251SH-02	Ball	220-240	50/60	0.31/0.26	42/37	2700/3000	178/190	5.04/5.38	13.3/12.1	56/60
LWAA17251SM-03	Ball	220-240	50	0.15	22	2450	155	4.39	8.0	52
LWAA17251SM-04	Ball	220-240	50	0.15	22	2450	155	4.39	8.0	52
LWAA17251SL-05	Ball	220-240	50	0.14	20	2050	133	3.77	4.0	47
LWAA17251SL-06	Ball	220-240	50	0.14	20	2050	133	3.77	4.0	47
LWAA17251SH-07	Sleeve	220-240	50/60	0.31/0.27	42/39	2700/2900	175/186	4.96/5.27	13.0/11.0	56/59
LWAA17251SH-08	Sleeve	220-240	50/60	0.31/0.27	42/39	2700/2900	175/186	4.96/5.27	13.0/11.0	56/59
LWAA17251SM-09	Sleeve	220-240	50	0.17	25	2400	155	4.39	6.8	51
LWAA17251SM-10	Sleeve	220-240	50	0.17	25	2400	155	4.39	6.8	51
LWAA17251SL-11	Sleeve	220-240	50	0.13	20	1950	130	3.68	2.7	45
LWAA17251SL-12	Sleeve	220-240	50	0.13	20	1950	130	3.68	2.7	45

