

LWAA22060 Series


Product Characteristic

- Frame: Aluminum alloy
- Impeller: PBT Plastic
- Protected: Impedance protected
- Connection: Lead Wire or Terminals
- Ball Bearing: -20°C to +70°C
- Sleeve Bearing: -10°C to +70°C
- Package: 10PCS/CTN



Technical Specifications

Model	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Static Pressure (mm-H₂O)	Noise [dB(A)]
LWAA22060SH-01	Ball	220-240	50	0.29	46	2350	390	11	24	61
LWAA22060SH-02	Ball	220-240	50	0.29	46	2350	390	11	24	61
LWAA22060TH-01	Ball	380	50	0.16	46	2350	390	11	24	61
LWAA22060TH-02	Ball	380	50	0.16	46	2350	390	11	24	61

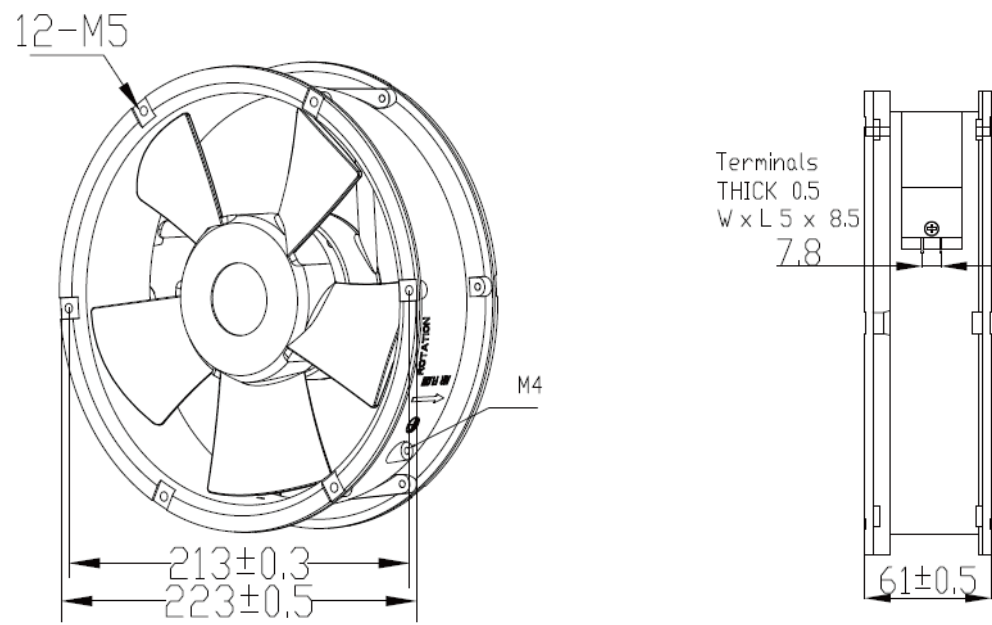

Air Flow-Static Pressure Characteristics

