

LWAD17251 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch-H2O	Pa	dBA	g	
LWAD17251MX-06	24	4.5	6000	456	12.91	56.9	2.24	558	75	790g	①
LWAD17251MX-07	24	3.5	5500	418	11.84	47.8	1.88	469	73.1	790g	②
LWAD17251MH-08	24	2.5	5000	380	10.76	39.5	1.56	387	71	790g	③
LWAD17251MM-09	24	2	4500	342	9.68	32	1.26	314	68.8	790g	④
LWAD17251ML-10	24	1.5	4000	304	8.61	25.3	1	248	66.2	790g	⑤
LWAD17251HX-06	48	2	6000	456	12.91	56.9	2.24	558	75	790g	①
LWAD17251HX-07	48	1.6	5500	418	11.84	47.8	1.88	469	73.1	790g	②
LWAD17251HH-08	48	1.2	5000	380	10.76	39.5	1.56	387	71	790g	③
LWAD17251HM-09	48	1	4500	342	9.68	32	1.26	314	68.8	790g	④
LWAD17251HL-10	48	0.6	4000	304	8.61	25.3	1	248	66.2	790g	⑤

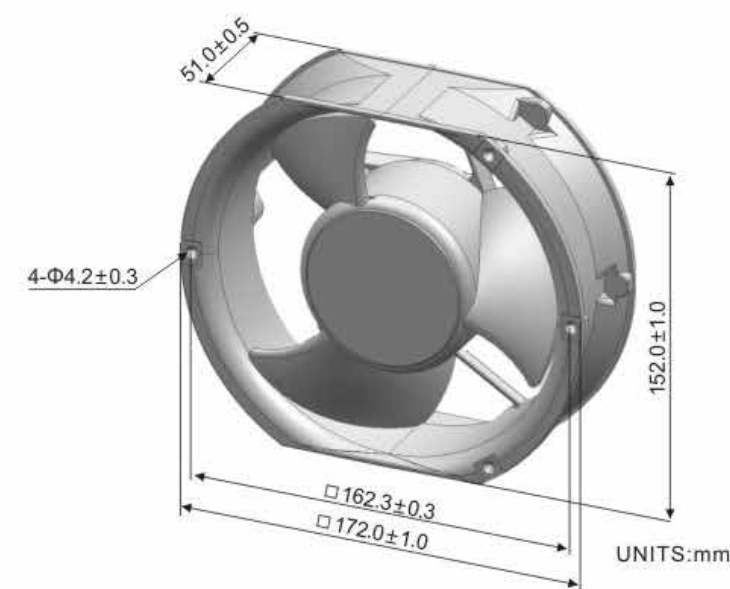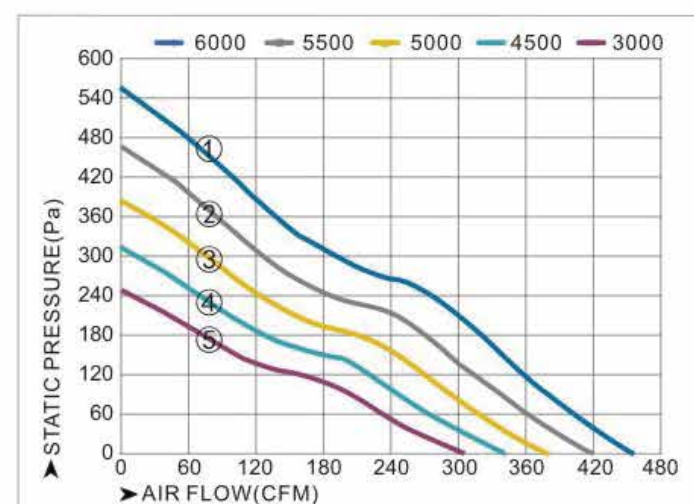

LWAD20060 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch-H2O	Pa	dBA	g	
LWAD20060LM-01	12	3.5	2500	560	15.86	17.1	0.67	168	62	960g	①
LWAD20060LL-02	12	2.5	2000	448	12.69	11	0.43	107	57.2	960g	②
LWAD20060MH-01	24	3.5	3000	672	19.03	24.6	0.97	241	66	960g	③
LWAD20060MM-02	24	2	2500	560	15.86	17.1	0.67	168	62	960g	④
LWAD20060ML-03	24	1.5	2000	448	12.69	11	0.43	107	57.2	960g	⑤
LWAD20060HM-01	48	1.5	2500	560	15.86	17.1	0.67	168	62	960g	
LWAD20060HL-02	48	0.6	2000	448	12.69	11	0.43	107	57.2	960g	

