

LWAD7010 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch-H2O	Pa	dBA	g	
LWAD7010KX-01	5	0.45	5000	35.9	1.02	4.4	0.17	43	40.5	28g	①
LWAD7010KH-02	5	0.4	4500	32.3	0.92	3.5	0.14	35	38.2	28g	②
LWAD7010KM-03	5	0.35	4000	28.7	0.81	2.8	0.11	27	35.7	28g	③
LWAD7010KL-04	5	0.25	3500	25.1	0.71	2.1	0.08	21	32.8	28g	④
LWAD7010KD-05	5	0.15	3000	21.5	0.61	1.6	0.06	15	29.4	28g	⑤
LWAD7010LX-01	12	0.2	5000	35.9	1.02	4.4	0.17	43	40.5	28g	①
LWAD7010LH-02	12	0.18	4500	32.3	0.92	3.5	0.14	35	38.2	28g	②
LWAD7010LM-03	12	0.16	4000	28.7	0.81	2.8	0.11	27	35.7	28g	③
LWAD7010LL-04	12	0.1	3500	25.1	0.71	2.1	0.08	21	32.8	28g	④
LWAD7010LD-05	12	0.06	3000	21.5	0.61	1.6	0.06	15	29.4	28g	⑤
LWAD7010MX-01	24	0.12	5000	35.9	1.02	4.4	0.17	43	40.5	28g	①
LWAD7010MH-02	24	0.1	4500	32.3	0.92	3.5	0.14	35	38.2	28g	②
LWAD7010MM-03	24	0.09	4000	28.7	0.81	2.8	0.11	27	35.7	28g	③
LWAD7010ML-04	24	0.07	3500	25.1	0.71	2.1	0.08	21	32.8	28g	④
LWAD7010MD-05	24	0.06	3000	21.5	0.61	1.6	0.06	15	29.4	28g	⑤

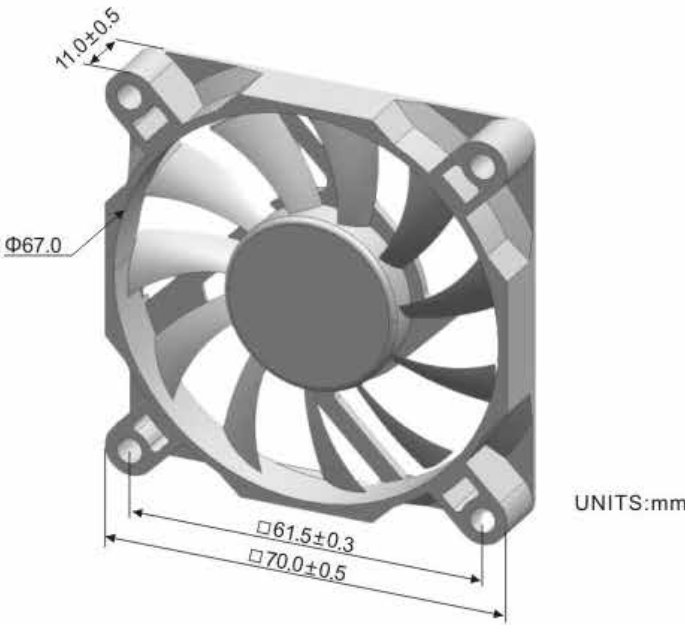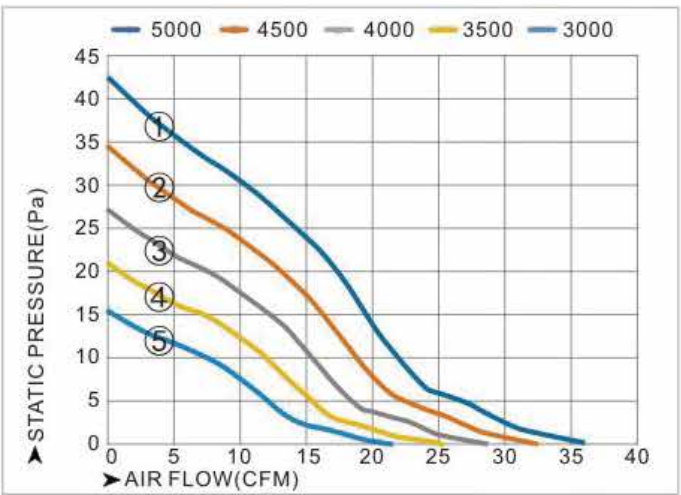

LWAD7015 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch-H2O	Pa	dBA	g	
LWAD7015KX-01	5	0.6	4500	32.9	0.93	4.7	0.18	46	35.8	45g	①
LWAD7015KH-02	5	0.5	4000	29.2	0.83	3.7	0.15	36	33.2	45g	②
LWAD7015KM-03	5	0.45	3500	25.6	0.72	2.8	0.11	28	30.3	45g	③
LWAD7015KL-04	5	0.4	3000	21.9	0.62	2.1	0.08	20	27	45g	④
LWAD7015KD-05	5	0.3	2500	18.3	0.52	1.4	0.06	14	23	45g	⑤
LWAD7015LX-01	12	0.3	4500	32.9	0.93	4.7	0.18	46	35.8	45g	①
LWAD7015LH-02	12	0.26	4000	29.2	0.83	3.7	0.15	36	33.2	45g	②
LWAD7015LM-03	12	0.22	3500	25.6	0.72	2.8	0.11	28	30.3	45g	③
LWAD7015LL-04	12	0.2	3000	21.9	0.62	2.1	0.08	20	27	45g	④
LWAD7015LD-05	12	0.15	2500	18.3	0.52	1.4	0.06	14	23	45g	⑤
LWAD7015MX-01	24	0.2	4500	32.9	0.93	4.7	0.18	46	35.8	45g	①
LWAD7015MH-02	24	0.16	4000	29.2	0.83	3.7	0.15	36	33.2	45g	②
LWAD7015MM-03	24	0.14	3500	25.6	0.72	2.8	0.11	28	30.3	45g	③
LWAD7015ML-04	24	0.12	3000	21.9	0.62	2.1	0.08	20	27	45g	④
LWAD7015MD-05	24	0.1	2500	18.3	0.52	1.4	0.06	14	23	45g	⑤

