

# LWDA630 Series


## Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -10℃~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




## Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA630T-F03	400	50	2540	4.7	890	/	94	003

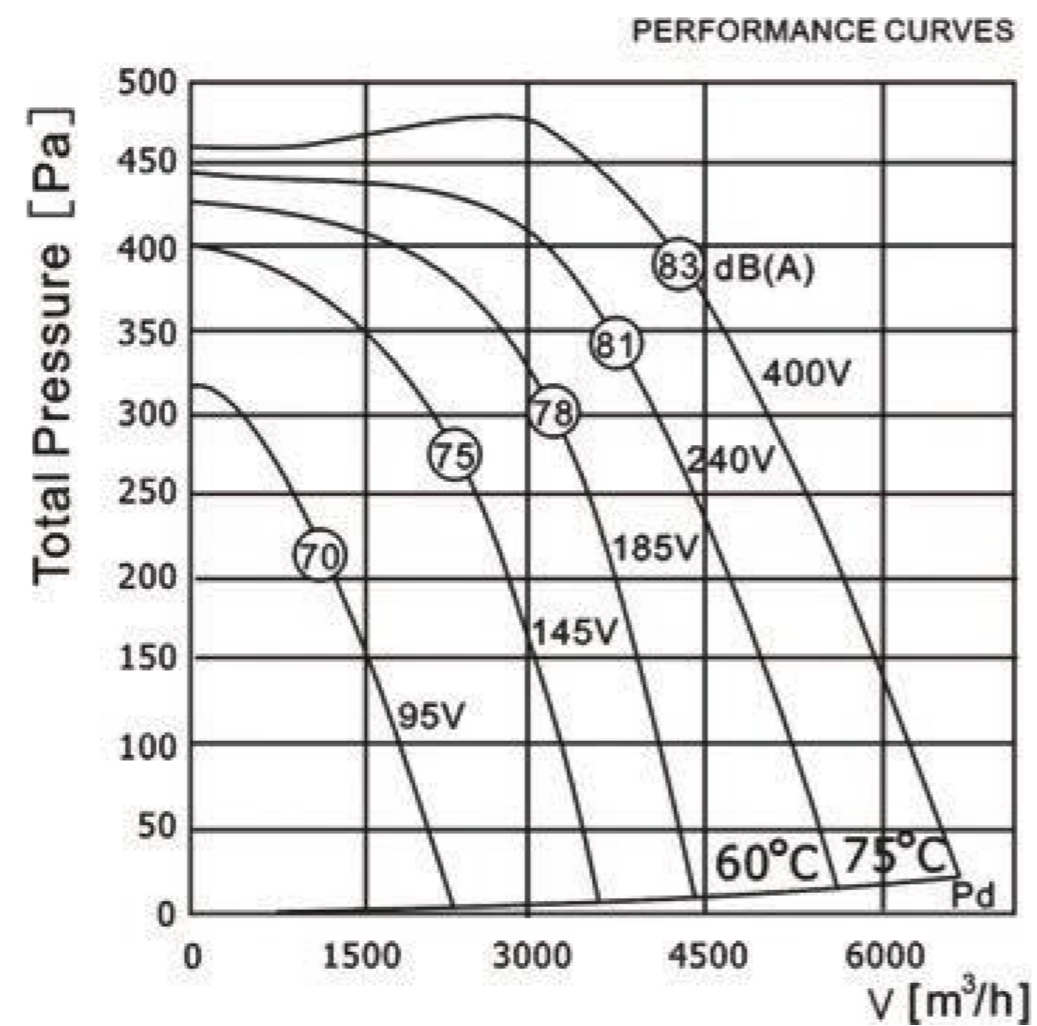

## Product Drawing (mm)

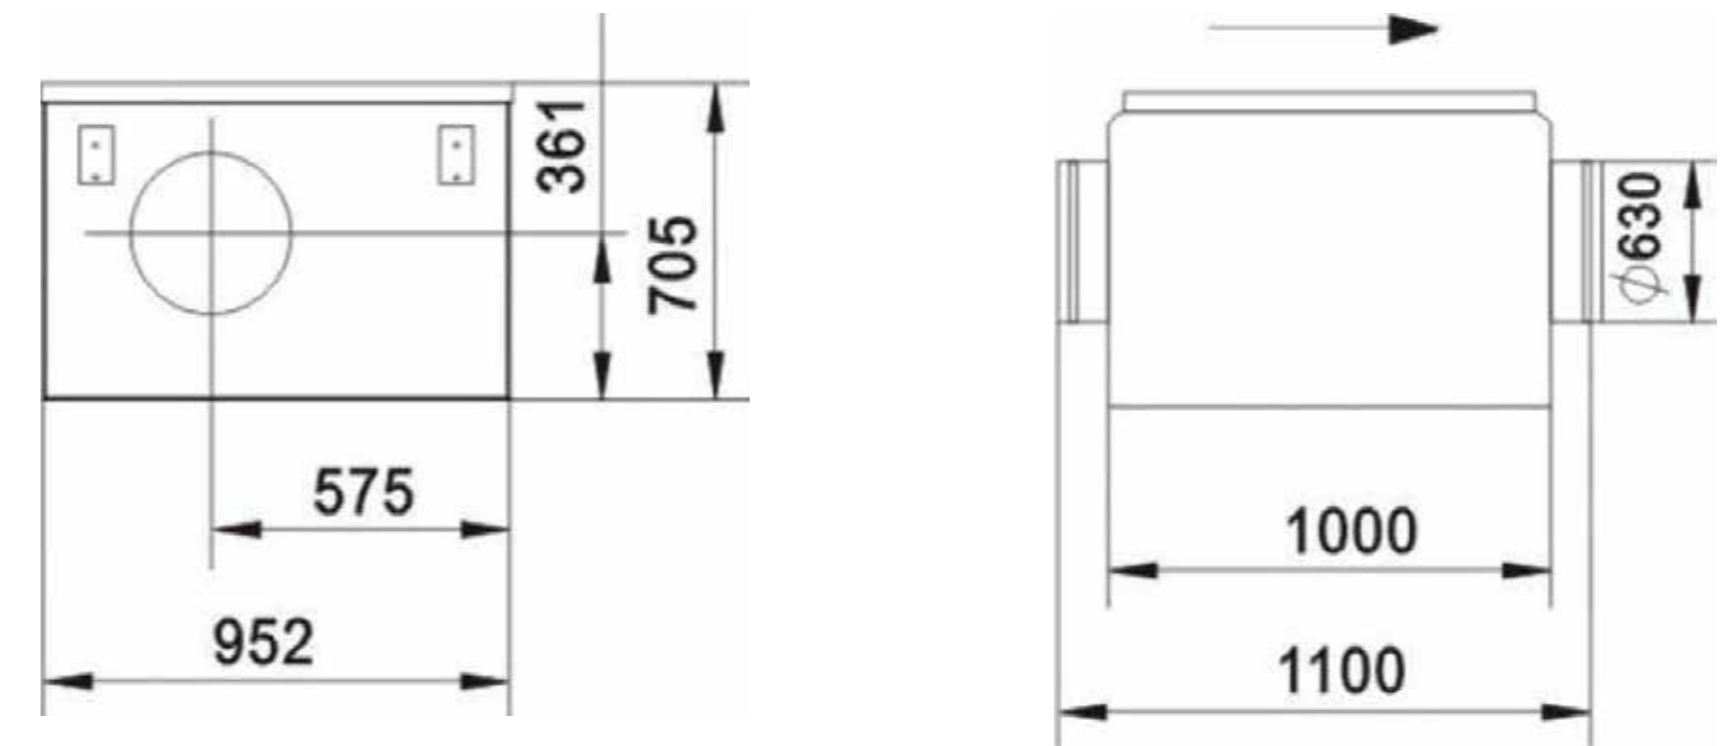

## Sound Data

ΔdB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-27	-34	-33	-32	-36	-34	-37	-40
LWA5	-11	-16	-22	-23	-18	-18	-22	-32
LWA6	0	-13	-12	-7	-5	-5	-9	-21