

LWFD5010 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWFD5010KX-01	5	0.4	6300	3.8	0.11	10.5	0.41	103	35.2	17g	①
LWFD5010KH-02	5	0.35	6000	3.6	0.1	9.5	0.37	93	34.1	17g	②
LWFD5010KM-03	5	0.3	5500	3.3	0.09	8	0.31	78	32.3	17g	③
LWFD5010KL-04	5	0.25	5000	3	0.09	6.6	0.26	65	30.2	17g	④
LWFD5010KD-05	5	0.2	4500	2.7	0.08	5.3	0.21	52	27.9	17g	⑤
LWFD5010LX-01	12	0.2	6300	3.8	0.11	10.5	0.41	103	35.2	17g	①
LWFD5010LH-02	12	0.16	6000	3.6	0.1	9.5	0.37	93	34.1	17g	②
LWFD5010LM-03	12	0.12	5500	3.3	0.09	8	0.31	78	32.3	17g	③
LWFD5010LL-04	12	0.1	5000	3	0.09	6.6	0.26	65	30.2	17g	④
LWFD5010LD-05	12	0.08	4500	2.7	0.08	5.3	0.21	52	27.9	17g	⑤
LWFD5010MX-01	24	0.12	6300	3.8	0.11	10.5	0.41	103	35.2	17g	①
LWFD5010MH-02	24	0.1	6000	3.6	0.1	9.5	0.37	93	34.1	17g	②
LWFD5010MM-03	24	0.08	5500	3.3	0.09	8	0.31	78	32.3	17g	③
LWFD5010ML-04	24	0.06	5000	3	0.09	6.6	0.26	65	30.2	17g	④
LWFD5010MD-05	24	0.04	4500	2.7	0.08	5.3	0.21	52	27.9	17g	⑤

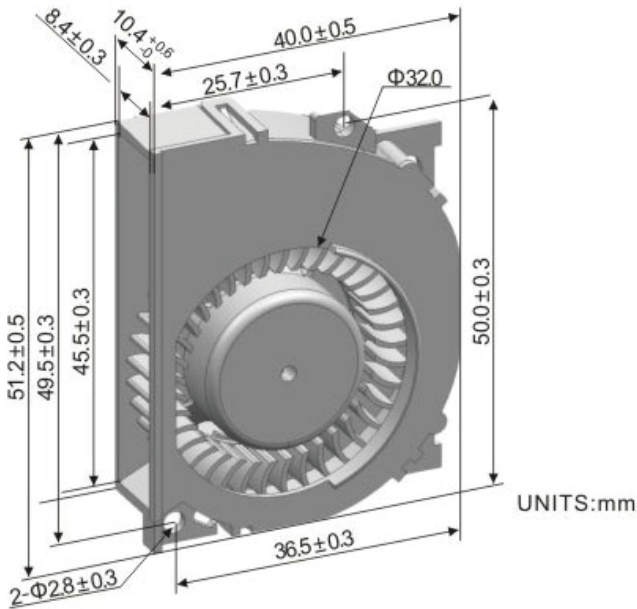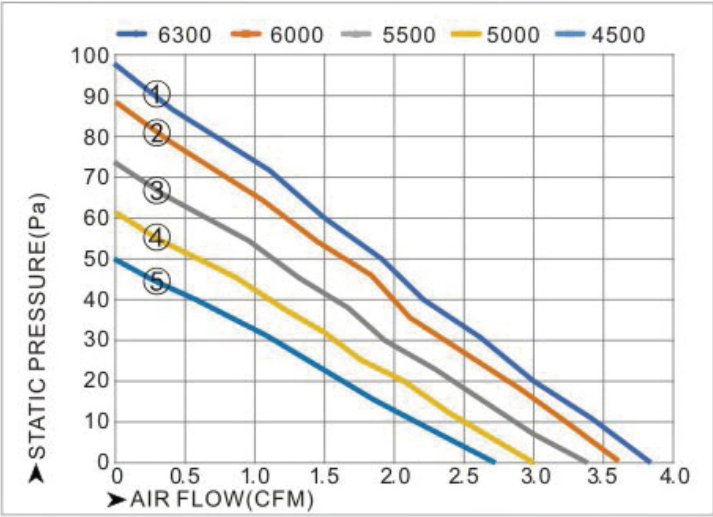

LWFD5015 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWFD5015KX-01	5	0.6	7000	4.9	0.14	23.6	0.93	231	47.1	29g	①
LWFD5015KH-02	5	0.5	6000	4.2	0.12	17.3	0.68	170	43.8	29g	②
LWFD5015KM-03	5	0.4	5000	3.5	0.1	12	0.47	118	39.8	29g	③
LWFD5015KL-04	5	0.35	4000	2.8	0.08	7.7	0.3	75	34.9	29g	④
LWFD5015KD-05	5	0.26	3000	2.1	0.06	4.3	0.17	42	28.7	29g	⑤
LWFD5015LX-01	12	0.26	7000	4.9	0.14	23.6	0.93	231	47.1	29g	①
LWFD5015LH-02	12	0.24	6000	4.2	0.12	17.3	0.68	170	43.8	29g	②
LWFD5015LM-03	12	0.2	5000	3.5	0.1	12	0.47	118	39.8	29g	③
LWFD5015LL-04	12	0.16	4000	2.8	0.08	7.7	0.3	75	34.9	29g	④
LWFD5015LD-05	12	0.12	3000	2.1	0.06	4.3	0.17	42	28.7	29g	⑤
LWFD5015MX-01	24	0.18	7000	4.9	0.14	23.6	0.93	231	47.1	29g	①
LWFD5015MH-02	24	0.16	6000	4.2	0.12	17.3	0.68	170	43.8	29g	②
LWFD5015MM-03	24	0.14	5000	3.5	0.1	12	0.47	118	39.8	29g	③
LWFD5015ML-04	24	0.12	4000	2.8	0.08	7.7	0.3	75	34.9	29g	④
LWFD5015MD-05	24	0.1	3000	2.1	0.06	4.3	0.17	42	28.7	29g	⑤

