

LWFD7515 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch-H2O	Pa	dBA	g	
LWFD7515KX-01	5	0.6	3700	6.7	0.19	16.9	0.66	165	41.9	47g	①
LWFD7515KH-02	5	0.5	3500	6.4	0.18	15.1	0.59	148	40.7	47g	②
LWFD7515KM-03	5	0.45	3000	5.4	0.15	11.1	0.44	109	37.3	47g	③
LWFD7515KL-04	5	0.4	2500	4.5	0.13	7.7	0.3	75	33.4	47g	④
LWFD7515KD-05	5	0.3	2000	3.6	0.1	4.9	0.19	48	28.5	47g	⑤
LWFD7515LX-01	12	0.3	3700	6.7	0.19	16.9	0.66	165	41.9	47g	①
LWFD7515LH-02	12	0.26	3500	6.4	0.18	15.1	0.59	148	40.7	47g	②
LWFD7515LM-03	12	0.22	3000	5.4	0.15	11.1	0.44	109	37.3	47g	③
LWFD7515LL-04	12	0.2	2500	4.5	0.13	7.7	0.3	75	33.4	47g	④
LWFD7515LD-05	12	0.15	2000	3.6	0.1	4.9	0.19	48	28.5	47g	⑤
LWFD7515MX-01	24	0.2	3700	6.7	0.19	16.9	0.66	165	41.9	47g	①
LWFD7515MH-02	24	0.16	3500	6.4	0.18	15.1	0.59	148	40.7	47g	②
LWFD7515MM-03	24	0.14	3000	5.4	0.15	11.1	0.44	109	37.3	47g	③
LWFD7515ML-04	24	0.12	2500	4.5	0.13	7.7	0.3	75	33.4	47g	④
LWFD7515MD-05	24	0.1	2000	3.6	0.1	4.9	0.19	48	28.5	47g	⑤

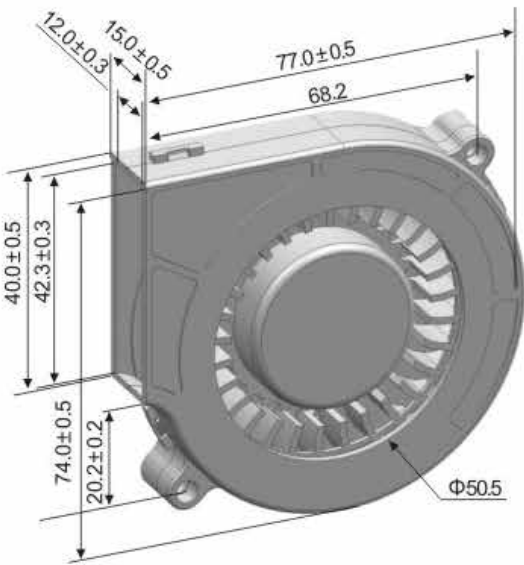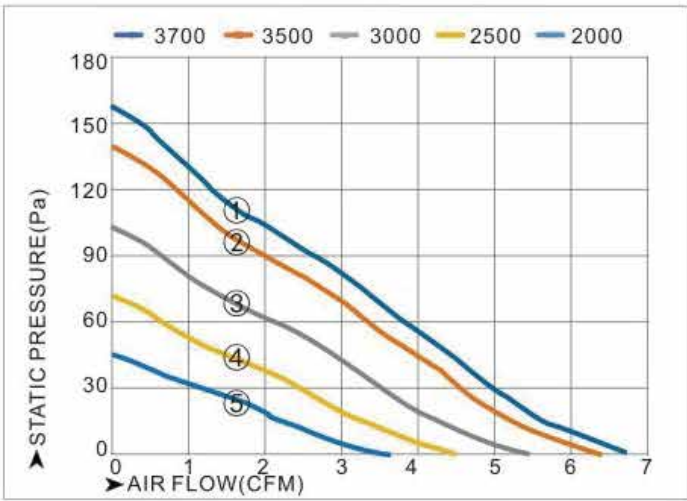

UNITS:mm

LWFD7525 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC), 24VDC(12~27.6VDC), 48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch-H2O	Pa	dBA	g	
LWFD7525LX-01	12	0.7	4500	14.2	0.4	27.7	1.09	272	50.7	67g	①
LWFD7525LH-02	12	0.6	4000	12.6	0.36	21.9	0.86	215	48.1	67g	②
LWFD7525LM-03	12	0.5	3500	11	0.31	16.8	0.66	164	45.2	67g	③
LWFD7525LL-04	12	0.4	3000	9.5	0.27	12.3	0.49	121	41.9	67g	④
LWFD7525LD-05	12	0.3	2500	7.9	0.22	8.6	0.34	84	37.9	67g	⑤
LWFD7525MX-01	24	0.4	4500	14.2	0.4	27.7	1.09	272	50.7	67g	①
LWFD7525MH-02	24	0.35	4000	12.6	0.36	21.9	0.86	215	48.1	67g	②
LWFD7525MM-03	24	0.3	3500	11	0.31	16.8	0.66	164	45.2	67g	③
LWFD7525ML-04	24	0.25	3000	9.5	0.27	12.3	0.49	121	41.9	67g	④
LWFD7525MD-05	24	0.2	2500	7.9	0.22	8.6	0.34	84	37.9	67g	⑤
LWFD7525HX-01	48	0.3	4500	14.2	0.4	27.7	1.09	272	50.7	67g	①
LWFD7525HH-02	48	0.25	4000	12.6	0.36	21.9	0.86	215	48.1	67g	②
LWFD7525HM-03	48	0.2	3500	11	0.31	16.8	0.66	164	45.2	67g	③
LWFD7525HL-04	48	0.15	3000	9.5	0.27	12.3	0.49	121	41.9	67g	④
LWFD7525HD-05	48	0.1	2500	7.9	0.22	8.6	0.34	84	37.9	67g	⑤

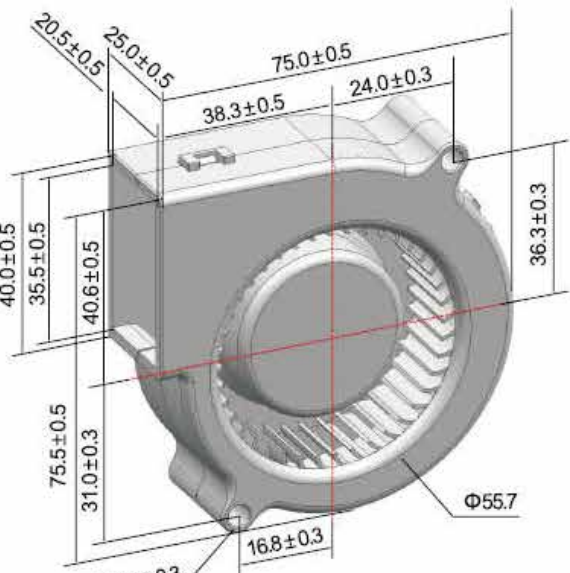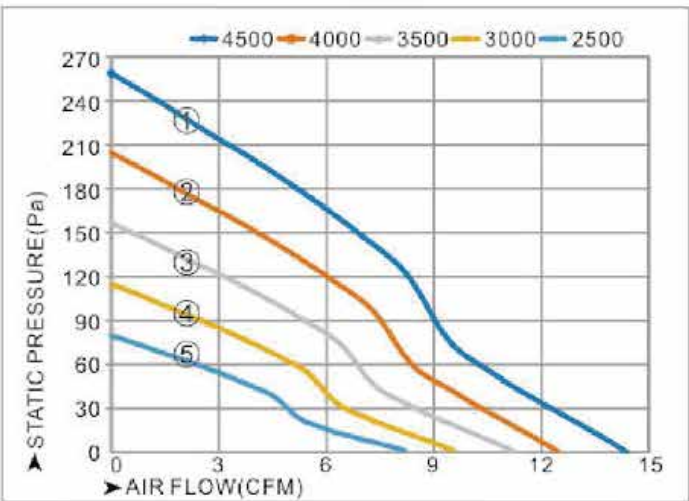

UNITS:mm