

LWGA108 Series


Product Characteristic

- Insulation class: H
- Housing & impeller: Aluminized sheet steel
- Flue temperature: ≤180 C (continuous)
≤240 C (instantaneous)
- Motor anti-vibration mounted
- Mounting position must be specified for corresponding support elements



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)
LWGA108S-09	230	50	33	0.28	1300	98	273

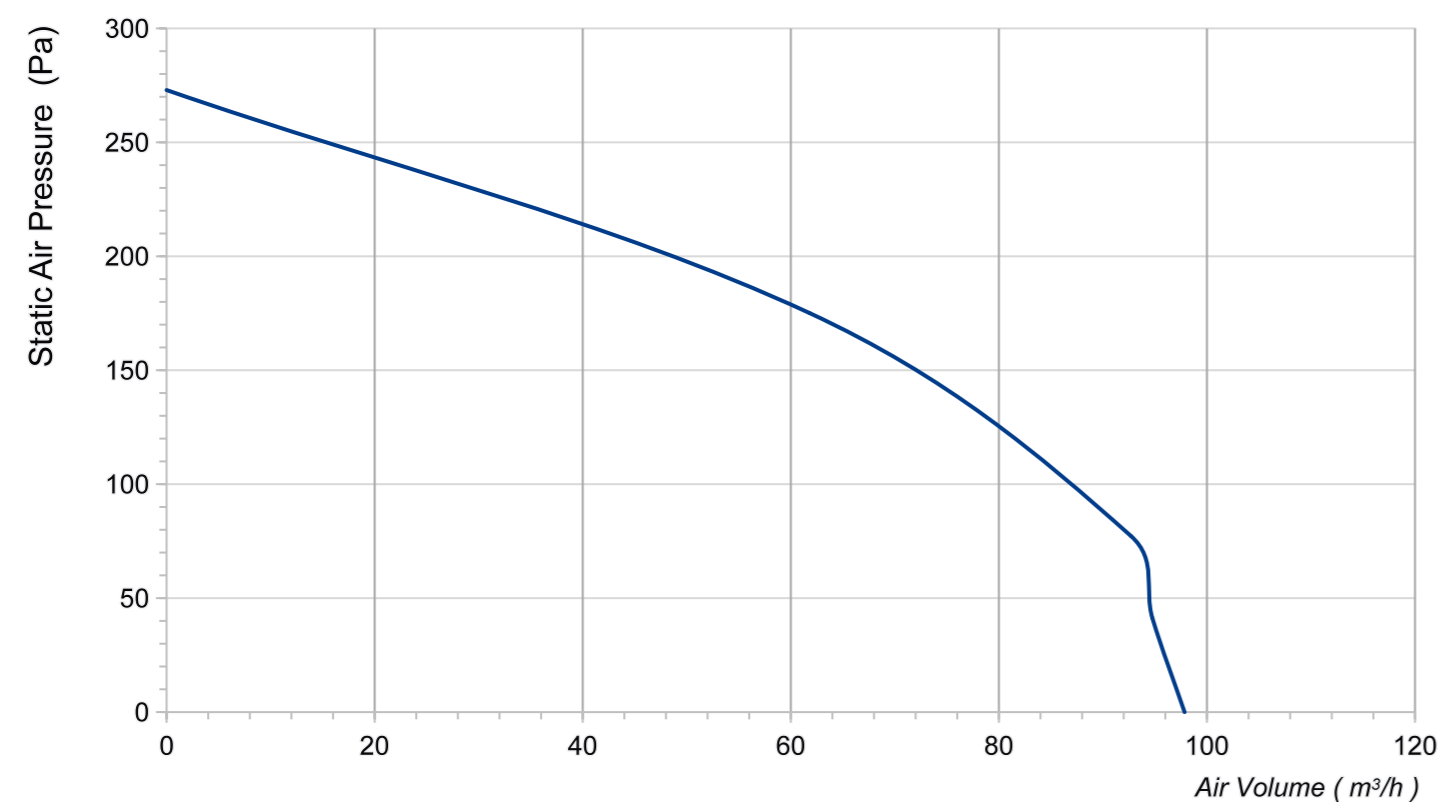

Product Drawing (mm)

